


TECHKON
Erfolg ist messbar



TECHKON SpectroDens

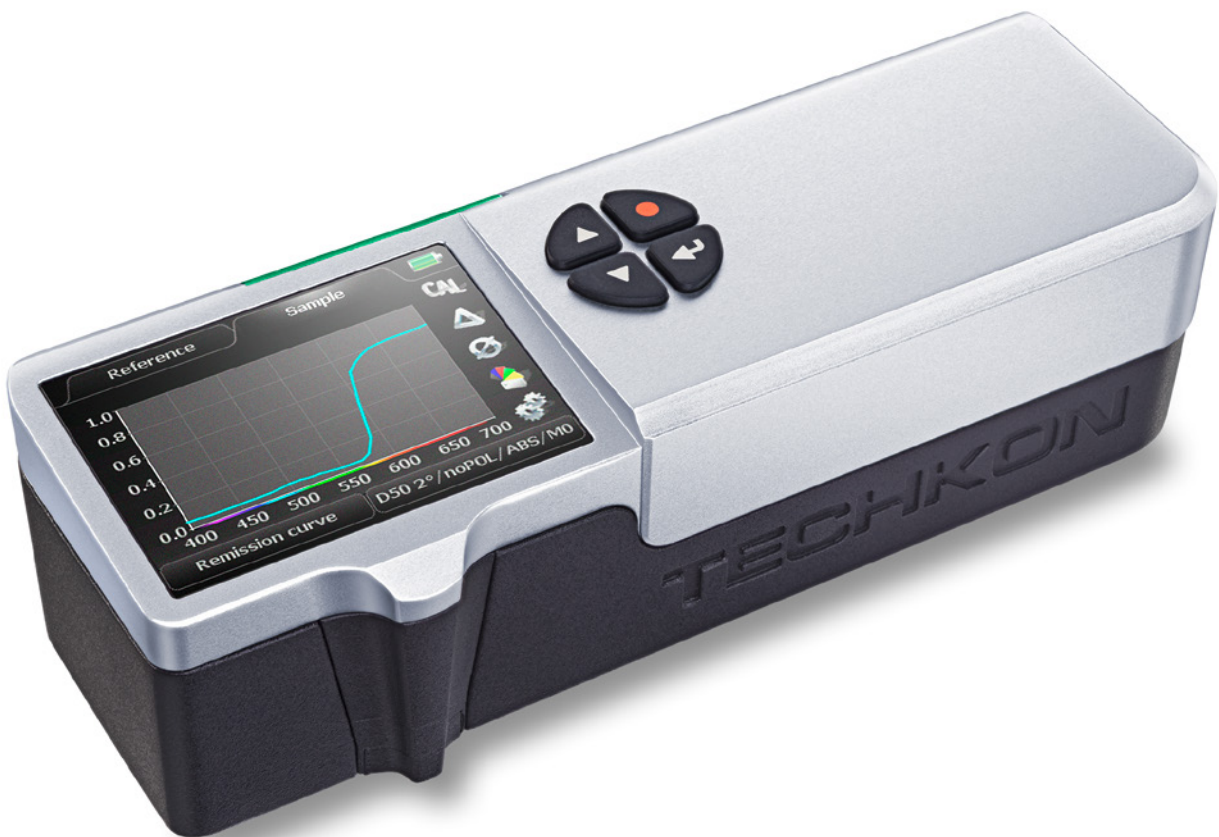

TECHKON SpectroDens – Spectro-Densitometer

The new era in color measurement

With the new SpectroDens generation TECHKON continues the success story of the SpectroDens hand-held devices in the long term. The dictum during product development was: Pursue proven concepts and integrate new meaningful technologies. The result sets a new standard.

A measurement device for all applications

SpectroDens is an all-purpose measurement device, that is universally used for quality control in the printing industry as well as for other tasks, where colors have to be judged critically. SpectroDens is exceptionally suitable, no matter which application. Thanks to the individually adjustable display functions, you can quickly set up the device for your particular job. The solid aluminum unibody case makes the device a reliable tool even in a harsh industrial environment. Direct positioning of the measurement head on the measurement field ensures a secure and quick measurement. In addition to single measurements you can easily carry out scan measurements. Tracking wheels on the bottom of the device make it possible to scan very fast up to 200 color patches at once on a print control strip or test chart.

Two devices in one

As a spectro-densitometer, SpectroDens combines the qualities of a highly accurate spectro-photometer and an easy-to-

use densitometer. Measurement is spectral, i.e. the entire color information – the spectral fingerprint of the color – is precisely registered. The data is converted into measurement data for descriptive analysis and display:

- Densitometric data is widely used in quality control during the printing process.
- Colorimetric data is used in the evaluation of print proofs, the creation of color profiles in color management as well as the color matching and formulation of inks.

Densitometry / Density measurement

A push of a button provides you with solid density as well as all useful additional information such as dot gain, dot area, gray balance and print contrast. In the automatic measurement mode the device always displays the relevant information instantly. You can even quickly and easily produce complete printing curves. The spectral measurement technology calculates not only density values for CMYK, but also exact data for the density of spot colors.

Colorimetry

All standard colorimetric functions are displayed clearly. Even the entire CIE L*a*b* color circle appears in the high resolution color display. As a result understanding CIE L*a*b* values be-

comes very easy and clear. In the color library 25.000 reference colors and complete digital color books can be saved.

Standardized measurement


Thanks to its ISO-compliant measuring head SpectroDens works strictly according to the standards valid for the graphic industry. Select different status filters for density measurement in the device settings. A special technical feature is the polarization filter which can be switched on and off by a push of a button and makes SpectroDens particularly good at evaluating the Ugra/Fogra media wedge.

Using the latest LED technology SpectroDens provides D50 illumination and therefore fulfills the M0, M1, M2, M3 measuring conditions in accordance to ISO 13655. The lifetime of the LED illumination is nearly unlimited. Moreover the new design of the direction-independent measuring head provides reliable measurements of a wide range of print media.

Software SpectroConnect

The supplied Windows-software TECHKON SpectroConnect provides the connection between SpectroDens and the PC via the micro-USB connector or via the optionally available WLAN-module. Measurement data can thus be comfortably processed on the PC and transferred, for example, to Microsoft Excel™.

Use the color library to load complete digital color books quickly and easily into the device. An import of color values in CXF® format is possible as well. SpectroConnect is also the connecting module for other applications, e.g. programs for the production of printing curves, for colorimetric quality control or for checking the compliance of printing products to ISO standards.

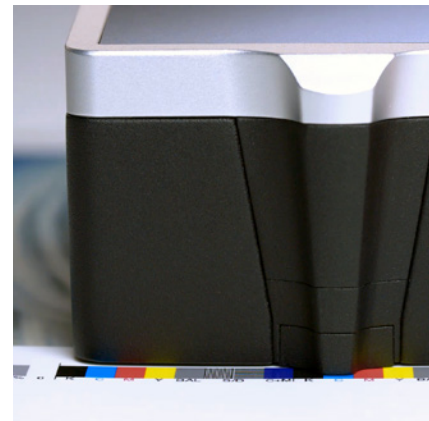

Versions and functions

We supply SpectroDens in three types of performance packages: The model Basic with all density functions and the Advanced version which adds essential colorimetric functions and a color library. The fully equipped flagship model SpectroDens Premium meets all demands with regard to quality control. All SpectroDens devices can also be used for short scans and feature a brilliant color display. The LED technology provides measurement conditions M0, M1, M2, M3 according to ISO 13655. Optionally data transmission by means of a WLAN module is possible. SpectroDens can be upgraded post-purchase by program upload to higher versions (charged service).

SpectroDens Basic

Automatic density ■ Density CMYK (with reference measurements) ■ Dot area ■ Dot gain ■ Print contrast ■ Gray and color balance ■ Ink trapping ■ Printing curve ■ Density spectrum ■ Spectral density for spot colors ■ Trend function Espresso mini ■ Slur/doubling ■ Dot area to Yule-Nielsen for printing plates ■ LED technology provides measurement conditions M0, M1, M2 and M3 according to ISO 13655 ■ Spot Colour Tone Value (SCTV) ■ Spot Colour Tone Value (SCTV) Printing curve ■ Average

SpectroDens Advanced

Same functions as SpectroDens Basic and additionally: ■ CIE L*a*b* ■ ΔE*a*b* ■ CIE L*C*h*ab ■ CIE XYZ ■ CIE color circle ■ ΔE*cmc ■ ΔE*CIE94 ■ ΔE*CIE2000 ■ Remission spectrum ■ InkCheck: Color control of spot colors ■ Color library with up to 20 color books and a total number of 25000 reference values ■ Memory capacity for 3000 sample values and 300 reference values ■ G7™

SpectroDens Premium

Same functions as SpectroDens Advanced and additionally: ■ Ugra/Fogra media wedge evaluation ■ ISO-Check: Color control according to ISO 12647 ■ CIE L*u*v* ■ CIE L*C*h*uv ■ CIE xyY ■ DIN Lab99 ■ Metamery index ■ Whiteness ■ Yellowness ■ Pass/fail tolerance ■ Opacity ■ OBA-Check

Software ■ SpectroConnect requires Windows 7, 8 or 10

Contents ■ Measurement device SpectroDens ■ Charging console with white standard ■ AC adapter with universal plugs ■ Micro-USB cable ■ CD with software TECHKON Spectro-Connect ■ Manual with ISO 9000 compliant certificate (pdf on CD) ■ Manufacturer certificate

Optional accessories ■ Small apertures ■ Print control strip TCS Digital ■ Color reference SpectroCheck ■ WLAN module ■ Upgrades for SpectroDens Basic and Advanced

Specifications

Measurement geometry	0°-45° optics according to ISO 5-4
Spectral range	400 to 700 nm in 10 nm steps, spectral resolution 10 nm, pixel distance sensor < 3 nm
Measurement aperture	3 mm round standard; 1.5 mm round optional
Light source	LED, provides measurement conditions M0, M1, M2, M3 according to ISO 13655
Polarization filter	Twice linear crossed, switched on and off per button release
Measurement time	Approx. 1 sec. per measurement; max. 10 seconds in scan mode
White reference	Absolute and relative; absolute white standard integrated in charging console
Illumination types	A, C, D50, D65, F 2/7/11
Standard observer	2°, 10°
Density filter	DIN 16536, DIN 16536 NB, ISO/ANSI T, ISO/ANSI I, ISO E; spectral density Dmax

Density measurement range	0.00 – 2.50 D
Repeatability	0.01 D; 0.03 CIE ΔE*a*b*
Inter-instrument agreement	0.01 D; 0.3 CIE ΔE*a*b*
Display	Color LC backlight display, anti-reflective, 320 x 240 pixels
Power supply	Rechargeable LiFePO4 battery, regulated recharge via charging console with AC adapter, 100 – 240 V, 47 – 63 Hz, approx. 10000 measurements per battery charge, battery level control
Communication port	USB; WLAN module optional
Weight	495 grams
Dimensions	62 x 50 x 185 mm (approx. 2.4 x 2.0 x 7.3 inches)
System requirements for TECHKON software:	Windows 7, 8 or 10; 32- and 64-bit, minimum: IBM-compatible PC with Intel Core Duo processor or comparable processor, 4 GB RAM, 2 USB ports